

Coaxial Adapter Series N/BNC

Features:

- Low VSWR

Applications:

- Wireless
- Transmitter
- Laboratory Test
- Radar

Electrical

Frequency: DC~4GHz
 VSWR: 1.15 max.
 Impedance: 50Ω


Environmental

Temperature: -60~+165 °C


Mechanical

RF Connectors: N, BNC
 Mating Life Cycle: 500 cycles
 Outer Conductor: Brass
 Dielectric: PEI
 Inner Conductor: Beryllium Copper or Brass


Outline Drawings

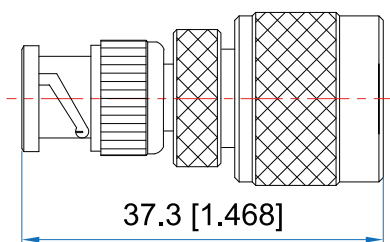


Outline A

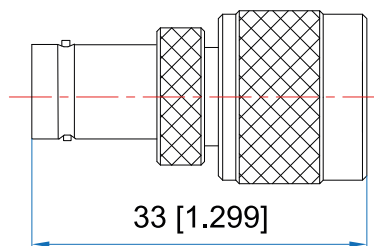

Outline B

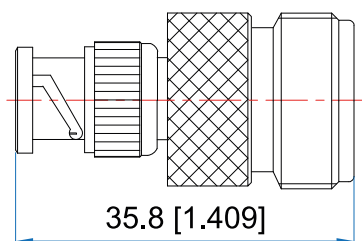

Outline C

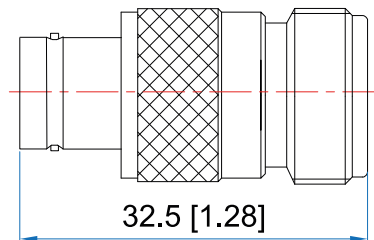

Outline D

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Interface:

RFC4 Nm-Bm: N(m) to BNC(m), Outline A

RFC4 Nm-Bf: N(m) to BNC(f), Outline B

RFC4 Nf-Bm: N(f) to BNC(m), Outline C

RFC4 Nf-Bf: N(f) to BNC(f), Outline D